

Widest Selection of Grouting Equipment in the World

A collage of 15 photographs demonstrating the use of Chem-Grip equipment in various construction and industrial applications. The images show workers using the equipment for tasks such as: applying surface treatments to concrete and asphalt; performing trench and pipe rehabilitation; conducting soil stabilization and grouting; and applying coatings to structural steel and masonry. The equipment is shown in both outdoor field settings and indoor industrial environments, highlighting its versatility. The Chem-Grip logo is visible on several pieces of the yellow and black machinery.



Heavy Construction
Mining
Geotechnical
Building Construction

Restoration Repair
Highway
Municipal
Maintenance/Plant

There's no substitute for experience.

For more than 45 years, ChemGrout has manufactured the world's largest selection of grouting equipment. Based in LaGrange Park, Illinois, ChemGrout offers both colloidal and paddle type grout mixers, as well as a variety of grout pumps, including piston, plunger and progressing cavity. The concepts of mixer-pump balance, user-friendly operation and ease of maintenance are emphasized in the design of our grouting systems. Enough technology is incorporated to maximize efficiency, yet not so much as to compromise ease of operation or maintenance.


Complete integrated mixing and pumping units are available in a variety of power options, including air, hydraulic, electric, electric/hydraulic, gasoline and diesel/hydraulic. All of our grout plants are offered skid mounted, with many available in a trailer version. To assist you in finding the grout plant that best fits your needs, we have provided a five step process, as well as a selection guide on the back cover.

Using proven methods, along with unique and innovative features, ChemGrout remains an industry leader for the equipment you can count on.

Mini-Series

CG-050M Hand Grout Pump

The industry's most powerful hand pump utilizes a positive displacement hand-driven 2" piston pump. It's rugged, lightweight and disassembles without tools for fast and efficient cleaning. For sand/cement or packaged grouts, the 050M provides injection pressures of more than 200 psi (14 bar). Net Wt. 52 lbs. (23.6 kg).

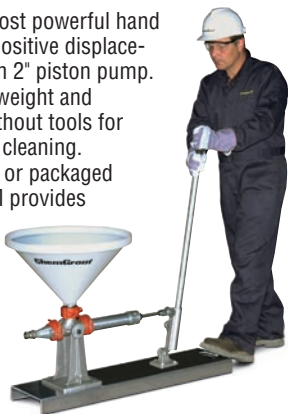

CG-050 Mini Grout Pump

Max. output 5 gpm (19 l/m); max. pressure 225 psi (16 bar); max. pressure 400 psi (28 bar) for hydraulic model. Pumps a bag of non-shrink grout per minute. Positive displacement 2" piston pump delivers sand/cement or packaged grouts. For small volume grouting in construction, maintenance & mining.



CG-550P Mini Grout Pump & Mixer

Max. output 5 gpm (19 l/m); max. pressure 225 psi (16 bar). Features the CG-050 2" piston pump. Mixes and pumps sand/cement or packaged grouts. Large 34 gal. (128 l) mixing tank offers easy, continuous pumping. Net Wt. 300 lbs. (136 kg) Drive power — air, hydraulic.



Rugged Series

CG-550/030 Rugged Series

Max. output 16 gpm (60 l/m); max. pressure 400 psi (27 bar). Powerful 3" piston pump allows single operator to mix and pump cement, bentonite and cement/sand slurries. Applications include well casings, void filling, underground pipe installation, slab jacking, restoration, pavement repair, soil & slab stabilization and self-leveling underlayments.



CG-555/030 Rugged Trailer



Workhorse Series

CG-550/C4 Workhorse Series

Max. output 8 gpm (30 l/m); max. pressure 174 psi (12 bar) or optional 261 psi (18 bar). Mixes & pumps cement, flyash, bentonite and sand, packaged non-shrink grouts and underlayments. Utilizes C4 progressing cavity pump. Consistent flow, with variable output from 0.5 gpm (2 l/m) to 8 gpm. One man operation.



CG-555/C4 Workhorse Trailer



Thick-Mix Series

CG-570/C6 Thick-Mix Series

Max. output 8 gpm (30 lpm); max. pressure 261 psi (18 bar). Mixes, pumps or sprays thick to thin materials including non-sag repair mortars, plasters, stuccos, fireproofing, waterproofing, bentonite and cement/sand grouts. Utilizes C6 progressive cavity pump.



CG-575/C6 Thick-Mix Trailer



Thin-Mix Series

CG-550/L4 Thin-Mix Series

Max. output 8 gpm (30 lpm); max pressure 174 psi (12 bar) or optional 261 psi (18 bar). This efficient grouter mixes and pumps cement, cement/bentonite and cement/flyash mixes. A single operator can mix and pump providing a non-stop discharge of material. Ideal for well grouting. Uses L4 progressive cavity pump.



CG-555/L4 Thin-Mix Trailer



Geothermal Series

CG-500/030/GT High-Capacity Geothermal Series

Max. output 16 gpm (60 lpm); max. pressure 400-500 psi (27-34 bar). The versatile CG500/030 Geothermal Series pumps bentonites, neat cement and the latest geothermal grouts. Two large 70-gallon mix tanks and a 45-gallon holding hopper permits continuous output, as each mix tank alternates feeding the pump. Utilizes powerful 3" single action piston pump. Series is available with a single or double mix tank design and a choice of several power options.

* Models shown with optional water batcher



CG-555/030/GT Geothermal Trailer



Versatile Series

CG-500/C6 Versatile Series

Max. output 20 gpm (76 l/m); max. pressure 174 psi (12 bar) or optional 261 psi (18 bar). Twin 70-gallon mix tanks on a single skid provide high volumes & continuous mixing for a wide range of applications. Mixes and pumps neat cement or sand/cement up to 2:1 ratios. Uses C6 progressive cavity pump.



CG-500/C6 Versatile Grout Plant



Colloidal Series

ChemGrout offers a wide variety of custom systems to fit the special requirements needed today for many unique applications. Please call us for information and pricing.

CG-600 Colloidal Series

Max output 20 gpm (76 lpm); max pressure 261 psi (18 bar). Combines the latest advances in colloidal mixing and meets the high-shear mixing standards required by a growing number of industries. Process reduces mix time and increases fluidity, both important factors in dam, rock and soil grouting. The high strength benefits of the colloidal process are also necessary for sensitive applications such as post-tensioning.



CG-680 High Capacity Colloidal Series

Max. output 45 gpm (170 lpm); max. pressure 261 psi (18 bar). High capacity colloidal grout plant is specially designed for large, heavy construction projects. Mixes and pumps slurries of cement, fly ash, bentonite and lime flour. Commonly used in tunneling, mining, dam foundations, soil compaction and encasements. Units feature both a 17 cubic foot colloidal mixer and agitating storage tank.



CG-620 Colloidal Mixer

The CG-620 is a skid mounted, stand-alone colloidal mixer, used with other ChemGrout agitating/pumping equipment. Featuring ChemGrout's "Turbo-Mix" colloidal mixing pump, the CG-620 is available in 8, 13 and 17 cubic foot sizes.




CG-680/3.5X8 High Pressure Colloidal Series

Max. output 32 gpm, (120 lpm); max pressure 1,200 psi (80 bar). High Pressure colloidal grout plant is ideal for heavy construction projects such as foundations, tunnels, mining and anchors. Cement slurries, bentonite, fly ash and lime flour are commonly used. Units feature 17 cubic foot colloidal mixer, 17 cubic foot agitating tank and high capacity, double acting plunger pump.



Accessories

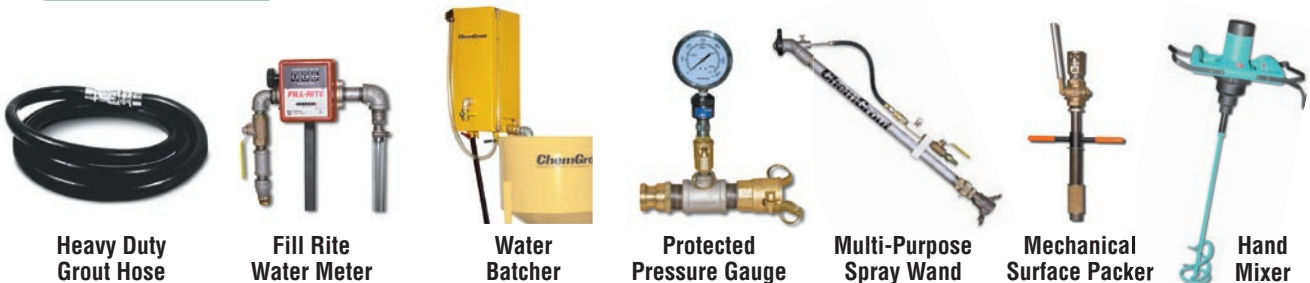

Heavy Duty Grout Hose

Fill Rite Water Meter

Water Batcher

Protected Pressure Gauge

Multi-Purpose Spray Wand

Mechanical Surface Packer

Hand Mixer

How to Select a Grout Plant:

Step 1:

Identify your application and determine the materials required.

Step 2:

Determine the maximum flow rate (GPM) and grouting discharge pressures (PSI) needed for your application.

Step 3:

Select a grout pump based on flow rate and pressure requirements.

050 Piston Pump 2" = 5 GPM, 225 PSI

030 Piston Pump 3" = 16 GPM, 400 PSI

C4 Progressive Cavity Pump = 8 GPM, 174/261 PSI

C6 Progressive Cavity Pump = 20 GPM, 174/261 PSI

Plunger Pump = 10-20 GPM, 1000, 1600, 2000 PSI

Step 5:

Select a model number (example: CG-500/3C6/A)

Part 1 – Mixing System (500) =
2 - 70 gallon mix tanks

Part 2 – Pump (3C6) = 20 GPM, 261 PSI

Part 3 – Power System (A) = Air

Step 4:

Select a power system.

A = Air

H = Hydraulic

EH = Electric/Hyd.

GH = Gas/Hyd.

DH = Diesel/Hyd.

ChemGrout®



Sprayer/Finisher Series**CG-502/C4
Sprayer/Finisher**

Max. output 8 gpm (30 lpm); max. pressure 174 psi (12 bar) or optional 261 psi (18 bar). Low profile design for surfacing, finishing/coating floors, walls and ceilings. Mixes and pumps self-leveling underlayments or sprays cementitious materials. Features twin 45 gallon mix tanks and C4 progressing cavity pump.

**CG-502/030
Multi-Purpose Grouter**

Maximum output 16 gpm (60 lpm), 400 psi (27 bar). Ideal for higher output, multi-purpose grouting applications. Handles a wide variety of materials ranging from fluid slurries to repair mortars. Features two 45 gallon mix tanks and 3" single acting piston pump.

**High Pressure Series****CG-500HP High Pressure Series**

Series features a double acting high pressure plunger pump available in 2 sizes. 2X8=15 gpm, 1600 psi, 3X8=20 gpm, 1000 psi. Unique pump design allows operator to customize discharge with an optional conversion kit. Perfect for cement slurries.

**CG-600HP
High Pressure
Colloidal Series**

Series features same double acting high pressure plunger pump as CG500HP with the advantages of colloidal high shear mixing. Standard machines utilize 13 cubic ft. colloidal mixer and 13 cubic ft. agitating storage tank. Commonly used for foundations and tie backs.



* Shown with optional water batcher

Sprayer Series**CG-540 Mixer & Pump/Sprayer**

Max. output 8 gpm (30 lpm); max. pressure 174 psi (12 bar) or optional 261 psi (18 bar). Compact grouter pumps and sprays cement grouts, coatings, underlayments, floor toppings and quick setting cementitious materials. Efficient mixer provides continuous operation. Spraying is done with use of optional spray wand.

**Cable & Rock Bolt Series****CG-542 Mining Grouter**

Max. output 3.5 gpm (13 lpm); 522 psi (36 bars). Low profile design ideal for a wide variety of mining and tunneling applications including rock bolts and cable stays. Mixes and pumps thicker grouts with low w:c ratios.

**High-Capacity Series****CG-580 High-Capacity Series**

Max. output 40 gpm (151 lpm); max. pressure 261 psi (18 bar). Mixes and pumps high volumes of material for a wide variety of applications. Unit features two 128-gallon (480 liters) mixing tanks, a 30-gallon (118 liters) holding hopper and your choice of 2J8 open throat or 3L8 progressive cavity grout pump. Rugged steel frame includes collapsible worker's platform and is available in several power options.

**Utiform Quattro**

Max output 13 gpm (49 lpm); max pressure 450 psi (31 bar). Self-contained with its own water pump, the wheel mounted Quattro delivers a steady, non-stop material flow for a variety of applications. Compact design allows easy movement through standard size doorways for access to the job site. Progressive cavity pump is ideal for cementitious grouts and self-leveling underlayments. Electric - requires 440V, 20A, 3-phase.



Grouting Equipment Selection Guide

Market Segments	Applications	COLLOIDAL																Materials				
		050	050HP	550P	540	542	Rugged 550/030	Workhorse 550/2C4	Thin-Mix 550/2L4	Thick-Mix 570	Quattro	500/550 Geothermal	Versatile 500	502	580	600	600HP		620	680 High Cap.	680 HP	
Heavy Construction Dams Tunnels Shafts	soil & rock						•		•			•	•	•		•	•	•		•	•	cement, cement/sand,** bentonite mixes
	void filling/waterproofing	•						•	•			•	•		•	•	•					
	anchor, cable, rock bolts					•	•	•				•	•			•	•					
	tie backs														•	•	•				•	
	encasements						•					•	•		•	•	•			•	•	
	foundation, soil, building stabilizing		•										•			•	•	•			•	
	marine/underwater		•	•				•		•			•	•			•		•			
Mining	high pressure												•			•	•	•			•	cement, cement/sand, mortars
	anchor, rock bolts					•	•	•				•	•			•	•					
	spraying				•		•	•			•											
Geotechnical	geothermal		•					•				•										cement, cement/sand, bentonite mixes
	well casings							•				•										
	abandoned shafts/holes			•				•	•				•									
Building Construction	post tension															•		•	•	•		cement, cement/sand, ** premixed grouts
	hollow metal filling-windows/doors	•		•																		
	precast	•		•																		
	machine base	•	•	•	•			•	•	•			•	•								
Restoration Repair	spraying				•			•			•	•										cement, cement/sand, premixed grouts, fireproofing, EIFS coating mortars, plasters/stuccos underlayments
	underlayments							•	•			•	•	•		•						
	waterproofing walls					•			•	•												
	resurfacing concrete					•			•	•					•							
	topping/bonded overlays					•																
	undersealing/slab raising	•	•	•				•	•	•	•	•	•	•		•						
Highway	undersealing							•	•	•	•		•	•	•		•					cement, cement/sand, cement/flyash, premixed grouts, manhole relining
	slab raising			•				•	•	•	•		•	•	•		•	•		•	•	
	doweling			•																		
	manhole sealing							•		•												
	bridge rehab			•				•	•	•	•		•									
Municipal	undersealing							•	•	•	•		•	•	•		•					cement, cement/sand, cement/flyash, manhole relining
	slab raising			•				•	•	•	•		•	•	•		•	•		•	•	
	manhole sealing							•		•												
Maintenance/ Plant	machine base/tank stabilization	•		•				•				•	•			•						cement, cement/sand, premixed grouts,
	encasements							•				•	•		•	•	•			•	•	

* HP Pumps can be teamed with ChemGrout mixers including 500HP or 620, 630 colloidal mixers

** Sand must be added at agitator with colloidal units

ChemGrout®

Widest Selection of Grouting Equipment in the World

ChemGrout, Inc., P. O. Box 1140, LaGrange Park, Illinois 60526 U.S.A.

Phone: 708/354-7112 • Fax: 708/354-3881

www.chemgrout.com